


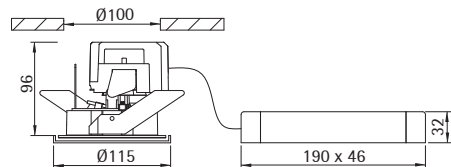


LED DIRECTIONAL and ADJUSTABLE WALLWASHER DOWNLIGHT for INGRESS PROTECTION with LENS

Round, Ø 115mm | Tilting angle 0-15°, rotatable 350°






Light source	: High performance Philips Fortimo LED light module
Lumen output	: 1100lm
Light colour	: Warm white, 3000K; Natural white, 4000K
Power consumption	: 10W
System efficacy	: 79 – 100lm/W
CRI	: >97
Voltage	: 220-240V / 50/60Hz (other voltages upon request)
Lifetime	: 50,000 hours (L70 at Tc 75°C)
Driver unit	: Philips Xitanium LED driver
	Operating temperature from -20 to +65°C
Cover	: Stainless steel rim and tempered glass
Reflector	: High specular aluminium silver
Diffuser	: Wide angle frosted glass lens
Tilting angle	: 0 to 15° (lockable) with 350° rotation
Heat sink	: Die-cast aluminium alloy with high heat conductance
Cable	: 400mm length multi-core cable
DALI control	: Optional
Ingress protection	: IP 55
Optimum working temperature	: 25°C
Weight	: 0.65 kg

31080.103 (1100lm, 3000K)

31080.104 (1100lm, 4000K)

LED DIRECTIONAL and ADJUSTABLE WALLWASHER DOWNLIGHT for INGRESS PROTECTION with LENS

Round, Ø 147mm | Tilting angle 0-25°, rotatable 350°

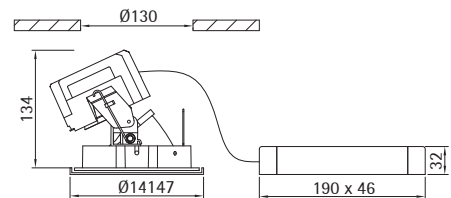

Light source	: High performance Philips Fortimo LED light module
Lumen output	: 1100lm; 2000lm
Light colour	: Warm white, 3000K; Natural white, 4000K
Power consumption	: 10 – 19W
System efficacy	: 79 – 100lm/W
CRI	: >97
Voltage	: 220-240V / 50/60Hz (other voltages upon request)
Lifetime	: 50,000 hours (L70 at Tc 75°C)
Driver unit	: Philips Xitanium LED driver
	Operating temperature from -20 to +65°C
Cover	: Stainless steel rim and tempered glass
Reflector	: High specular aluminium silver
Diffuser	: Wide angle frosted glass lens
Tilting angle	: 0 to 25° (lockable) with 350° rotation
Heat sink	: Die-cast aluminium alloy with high heat conductance
Cable	: 400mm length multi-core cable
DALI control	: Optional
Ingress protection	: IP 55
Optimum working temperature	: 25°C
Weight	: 0.96 kg

31051.103 (1100lm, 3000K)





31051.203 (2000lm, 3000K)

31051.104 (1100lm, 4000K)

31051.204 (2000lm, 4000K)

LED DIRECTIONAL and ADJUSTABLE WALLWASHER DOWNLIGHT for INGRESS PROTECTION with LENS

Round, Ø 176mm | Tilting angle 0-20°, rotatable 350°


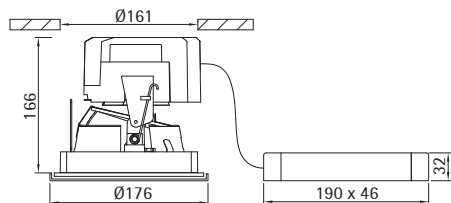



Light source	: High performance Philips Fortimo LED light module
Lumen output	: 2000lm; 3000lm
Light colour	: Warm white, 3000K; Natural white, 4000K
Power consumption	: 19 – 32W
System efficacy	: 77 – 100lm/W
CRI	: >97
Voltage	: 220-240V / 50/60Hz (other voltages upon request)
Lifetime	: 50,000 hours (L70 at Tc 70°C)
Driver unit	: Philips Xitanium LED driver
	Operating temperature from -20 to +65°C
Cover	: Stainless steel rim and tempered glass
Reflector	: High specular aluminium silver
Diffuser	: Wide angle frosted glass lens
Tilting angle	: 0 to 20° (lockable) with 350° rotation
Heat sink	: Die-cast aluminium alloy with high heat conductance
Cable	: 400mm length multi-core cable
DALI control	: Optional
Ingress protection	: IP 55
Optimum working Temperature	: 25°C
Weight	: 1.64 kg

31073.203	(2000lm, 3000K)
31073.303	(3000lm, 3000K)
31073.204	(2000lm, 4000K)
31073.304	(3000lm, 4000K)

LED DIRECTIONAL and ADJUSTABLE WALLWASHER DOWNLIGHT for INGRESS PROTECTION with LENS

Round, Ø 176mm | Tilting angle 0-20°, rotatable 350°



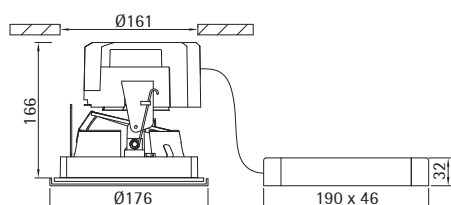


Light source	: High performance Philips Fortimo LED light module
Lumen output	: 2000lm; 3000lm
Light colour	: Warm white, 3000K; Natural white, 4000K
Power consumption	: 19 – 32W
System efficacy	: 77 – 95lm/W
CRI	: >97
Voltage	: 220-240V / 50/60Hz (other voltages upon request)
Lifetime	: 50,000 hours (L70 at Tc 75°C)
Driver unit	: Philips Xitanium LED driver
	Operating temperature from -20 to +65°C
Cover	: Stainless steel rim and tempered glass
Reflector	: High specular aluminium silver
Diffuser	: Wide angle frosted glass lens
Tilting angle	: 0 to 20° (lockable) with 350° rotation
Heat sink	: Die-cast aluminium alloy with high heat conductance
Cable	: 400mm length multi-core cable
DALI control	: Optional
Ingress protection	: IP 55
Optimum working Temperature	: 25°C
Weight	: 1.87 kg

31074.203	(2000lm, 3000K) DL
31074.303	(3000lm, 3000K) DL
31074.204	(2000lm, 4000K) DL
31074.304	(3000lm, 4000K) DL

LED DIRECTIONAL and ADJUSTABLE WALLWASHER DOWNLIGHT for INGRESS PROTECTION with LENS

Round, Ø 185mm | Tilting angle 0-30° , rotatable 350°

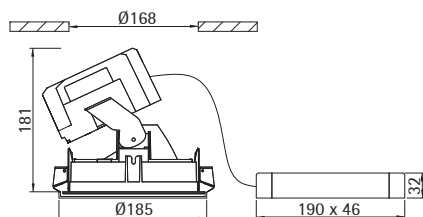

Light source	: High performance Philips Fortimo LED light module
Lumen output	: 2000lm; 3000lm
Light colour	: Warm white, 3000K; Natural white, 4000K
Power consumption	: 19 – 32W
System efficacy	: 77 – 100lm/W
CRI	: >97
Voltage	: 220-240V / 50/60Hz (other voltages upon request)
Lifetime	: 50,000 hours (L70 at Tc 75°C)
Driver unit	: Philips Xitanium LED driver
	Operating temperature from -20 to +65°C
Cover	: Stainless steel rim and tempered glass
Reflector	: High specular aluminium silver
Diffuser	: Wide angle frosted glass lens
Tilting angle	: 0 to 30° (lockable) with 350° rotation
Heat sink	: Die-cast aluminium alloy with high heat conductance
Cable	: 400mm length multi-core cable
DALI control	: Optional
Ingress protection	: IP 55
Optimum working temperature	: 25°C
Weight	: 1.50 kg

31044.203 (2000lm, 3000K)



31044.303 (3000lm, 3000K)

31044.204 (2000lm, 4000K)

31044.304 (3000lm, 4000K)

LED DIRECTIONAL and ADJUSTABLE WALLWASHER DOWNLIGHT for INGRESS PROTECTION with LENS

Round, Ø 185mm | Tilting angle 0-35° , rotatable 350°

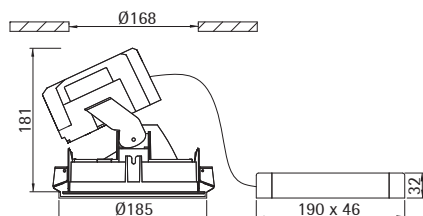

Light source	: High performance Philips Fortimo LED light module
Lumen output	: 2000lm; 3000lm
Light colour	: Warm white, 3000K; Natural white, 4000K
Power consumption	: 19 – 32W
System efficacy	: 77 – 95lm/W
CRI	: >97
Voltage	: 220-240V / 50/60Hz (other voltages upon request)
Lifetime	: 50,000 hours (L70 at Tc 75°C)
Driver unit	: Philips Xitanium LED driver
	Operating temperature from -20 to +65°C
Cover	: Stainless steel rim and tempered glass
Reflector	: High specular aluminium silver
Diffuser	: Wide angle frosted glass lens
Tilting angle	: 0 to 30° (lockable) with 350° rotation
Heat sink	: Die-cast aluminium alloy with high heat conductance
Cable	: 400mm length multi-core cable
DALI control	: Optional
Ingress protection	: IP 55
Optimum working temperature	: 25°C
Weight	: 1.76 kg

31052.203 (2000lm, 3000K) DL

31052.303 (3000lm, 3000K) DL

31052.204 (2000lm, 4000K) DL

31052.304 (3000lm, 4000K) DL