




LED DOWNLIGHT with LENS

Square, □142 x 142mm

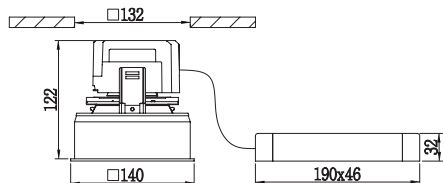

Light source	: High performance Philips Fortimo LED light module
Lumen output	: 1100lm; 2000lm
Light colour	: Warm white, 3000K; Natural white, 4000K
Power consumption	: 10 – 19W
System efficacy	: 79 – 100lm/W
CRI	: >95
Voltage	: 220–240V / 50/60Hz (other voltages upon request)
Lifetime	: 50,000 hours (L70 at Tc 75°C)
Driver unit	: Philips Xitanium LED driver






Operating temperature from -20 to +65°C

Ceiling rim	: Die-cast aluminium with white powder coating (RAL 9002)
Reflector	: MIRO Silver in matte finish
Diffuser	: Wide angle frosted glass lens
Heat sink	: Die-cast aluminium alloy with high heat conductance
Cable	: 400mm length multi-core cable
DALI control	: Optional
Ingress protection	: IP 20
Optimum working temperature	: 25°C
Weight	: 0.84 kg

31032.103	<i>(1100lm, 3000K)</i>
31032.203	<i>(2000lm, 3000K)</i>
31032.104	<i>(1100lm, 4000K)</i>
31032.204	<i>(2000lm, 4000K)</i>

LED DOWNLIGHT with LENS

Square, □180 x 180mm

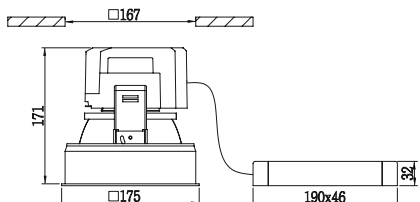

Light source	: High performance Philips Fortimo LED light module
Lumen output	: 2000lm; 3000lm
Light colour	: Warm white, 3000K; Natural white, 4000K
Power consumption	: 19 – 32W
System efficacy	: 77 – 100lm/W
CRI	: >95
Voltage	: 220–240V / 50/60Hz (other voltages upon request)
Lifetime	: 50,000 hours (L70 at Tc 75°C)
Driver unit	: Philips Xitanium LED driver






Operating temperature from -20 to +65°C

Ceiling rim	: Die-cast aluminium with white powder coating (RAL 9002)
Reflector	: MIRO Silver in matte finish
Diffuser	: Wide angle frosted glass lens
Heat sink	: Die-cast aluminium alloy with high heat conductance
Cable	: 400mm length multi-core cable
DALI control	: Optional
Ingress protection	: IP 20
Optimum working temperature	: 25°C
Weight	: 1.49 kg

31027.203	<i>(2000lm, 3000K)</i>
31027.303	<i>(3000lm, 3000K)</i>
31027.204	<i>(2000lm, 4000K)</i>
31027.304	<i>(3000lm, 4000K)</i>

LED WALLWASHER DOWNLIGHT with LENS

Square, □180 x 180mm | Tilting angle 18°

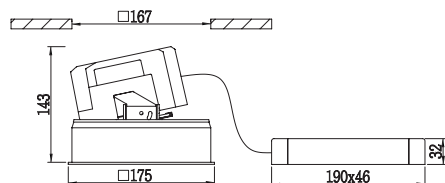

Light source	: High performance Philips Fortimo LED light module
Lumen output	: 2000lm; 3000lm
Light colour	: Warm white, 3000K; Natural white, 4000K
Power consumption	: 19 – 32W
System efficacy	: 77 – 100lm/W
CRI	: > 95
Voltage	: 220-240V / 50/60Hz (other voltages upon request)
Lifetime	: 50,000 hours (L70 at Tc 75°C)
Driver unit	: Philips Xitanium LED driver



Operating temperature from -20 to +65°C

Ceiling rim	: Die-cast aluminium with white powder coating (RAL 9002)
Reflector	: MIRO Silver in matte finish
Diffuser	: Wide angle frosted glass lens
Heat sink	: Die-cast aluminium alloy with high heat conductance
Cable	: 400mm length multi-core cable
DALI control	: Optional
Ingress protection	: IP 20
Optimum working temperature	: 25°C
Weight	: 1.41 kg

31084.203 (2000lm, 3000K)




31084.303 (3000lm, 3000K)

31084.204 (2000lm, 4000K)

31084.304 (3000lm, 4000K)

LED TRIMLESS DOWNLIGHT with LENS

Square, □105 x 105mm

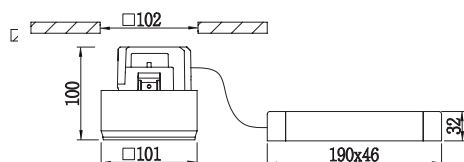

Light source	: High performance Philips Fortimo LED light module
Lumen output	: 1100lm
Light colour	: Warm white, 3000K; Natural white, 4000K
Power consumption	: 10W
System efficacy	: 79 – 100lm/W
CRI	: > 95
Voltage	: 220-240V / 50/60Hz (other voltages upon request)
Lifetime	: 50,000 hours (L70 at Tc 75°C)
Driver unit	: Philips Xitanium LED driver



Operating temperature from -20 to +65°C

Ceiling rim	: Die-cast aluminium with white powder coating (RAL 9002)
Reflector	: MIRO Silver in matte finish
Diffuser	: Wide angle frosted glass lens
Heat sink	: Die-cast aluminium alloy with high heat conductance
Cable	: 400mm length multi-core cable
DALI control	: Optional
Ingress protection	: IP 20
Optimum working temperature	: 25°C
Weight	: 0.59 kg

31087.103 (1100lm, 3000K)

31087.104 (1100lm, 4000K)



